OFFICE OF THE MARION COUNTY SURVEYOR SECTION RECORD CORNER

SECTION 1 5-6-05 TOWNSHIP\_ \_14\_\_\_ RANGE \_\_4\_ PARTY CHIEF: Wilcoxen CREW: -

TYPE OF MARKER: Harrison Fd

METHOD OF ESTABLISHMENT: County: 10-21-99


IN. S.P.C. E ZONE NAD '83


NAME:

14040106

N: E: 492999.0292(m)

69224.9638(m)



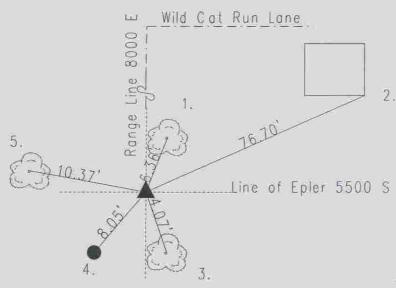

Original post set 1820 by Hendricks with following witness: 10" ash S 82 W 10 links, 14" ash S 85 E 12 links per Marion County Atlas pg. 9. Hosbrook 12-20-1852 called witness: 18" osh N 33 1/2 W 16 links per Franklin Township Legal Survey Book pg. 18. 6-5-75 called for stone, 9-20-79 called same. Excavated 8-8-86 and Harrison set. Re-tied 4-30-93 by Wilcoxen. Re-tied 10-21-99 by Kiste. Re-tied 5-6-05 by Wilcoxen.

	1404010	Įb
REF.	DISTANCE	DESCRIPTION
1.	6.36	Mag nail w/brass washer F 20" ash 28"up
5.	76.70'	SF corner of foundation ADDRESS 8011
3.	4.07'	Mag nail w/brass washer in spur root multi ash
4.	8.05	MCSO capped rebar by large green rock
5.	10.37	Mag nail w/brass washer N 10" hackberry 42" up